

Introduction

This document describes the installation procedures for Download-i USB, which are the devices that allow you to communicate with Guardus™.

System Requirements

- Pentium I 300MHz computer or higher.
- USB port available in your computer.
- Windows 7, Windows Vista, Windows Server 2003, Windows XP Sp2, Windows 2000 or Windows 98SE.
- CD/DVD Driver (if using Contronics CD-Rom). Alternative: download driver from Contronics website.

Download-i components


Download-i RF Download-i USB V2	
Communication Cable	

Note: The Download-i RF interface differentiates itself from the Download USB V2 because of the capability to read iButton and RFTags. This interface has an infrared reader.


Download-i Installation for Windows XP

- 1 Turn your computer on, boot Windows and log on as and administrator user.
- 2 Download the driver on Contronics web site: **www.contronics.com**
- 3 Connect the Download-i USB into your computer's USB port using the Communication Cable.


- 4 Windows will prompt you that a new hardware Has been found.




- 5 Select **Install from a list or specific location (Advanced)**. Click Next.

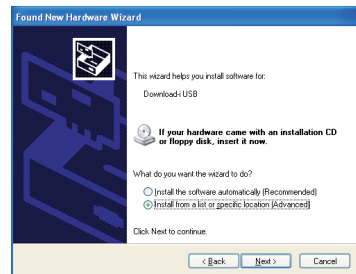

- 6 Click **Don't search. I will choose the driver to install**. Click next

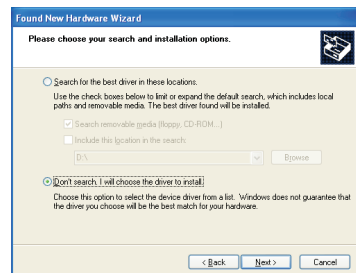


- 7 Click on **Have disk**.

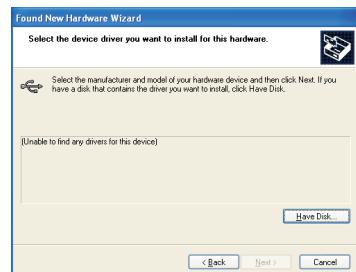


Download-i Installation for Windows XP


8 Click on **Search**.

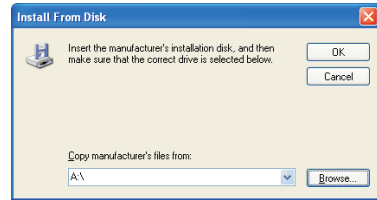

9 Specify the driver folder and click on **Open**.

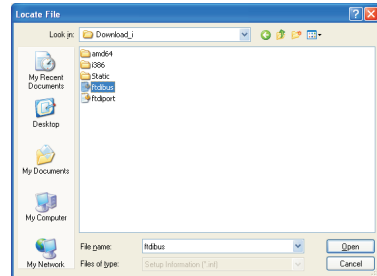

10 Click **OK**.

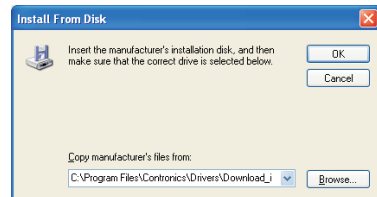


11 In case this screen appears, you can safely proceed by clicking on **Continue Anyway**. Wait for installation.




Download-i Installation for Windows XP

- 12 Click **Finish** to complete the installation process in your computer.

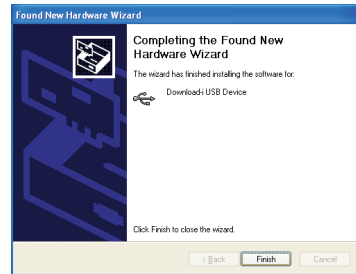

- 13 Set up PROGuard to the interface you are using. On the Interface menu choose **Configure**. On the Window **Interface Configuration**, select the option: Download-iRF ou Download-i USB local download via USB port.

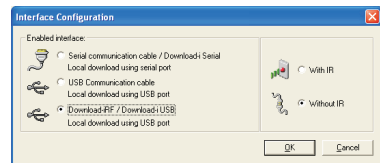


Download-i Installation for Windows Vista and Windows 7


- 1 Turn your computer on, boot Windows and log on as administrator user.
- 2 Download the driver on Contronics web site: **www.contronics.com**
- 3 Connect the Download-i USB into your computer's USB port using the Communication Cable.
- 4 Now insert the USB cable of the interface Download / Download IRF in USB port of computer for the first time, Windows will try to install your new hardware, however, will show you the message **The device driver software was not successfully installed.**

Download-i Installation for Windows Vista and Windows 7


5 In **Device Manager**, expand the **Other Devices** item.

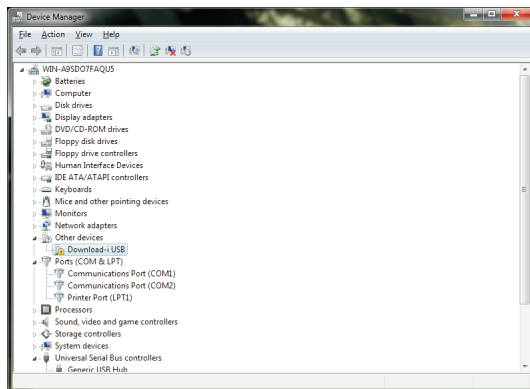

6 Right click on **Download-i USB** and select **Update Driver Software**.

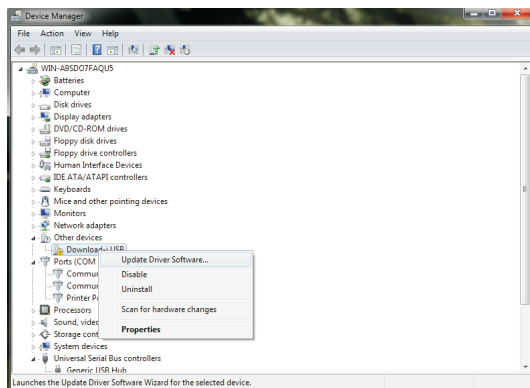


7 Select the option **Browse my computer for driver software**.

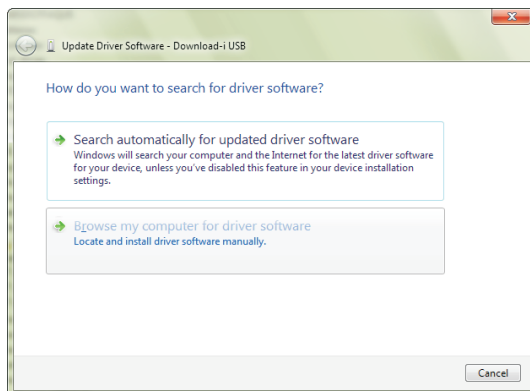


Download-i Installation for Windows Vista and Windows 7


- 8 Specify the driver folder and click on **Next**.

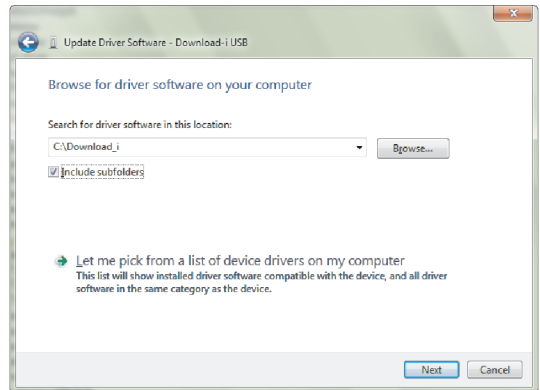

- 9 In case this screen appears, you can safely proceed by clicking on **Install this driver software anyway**.

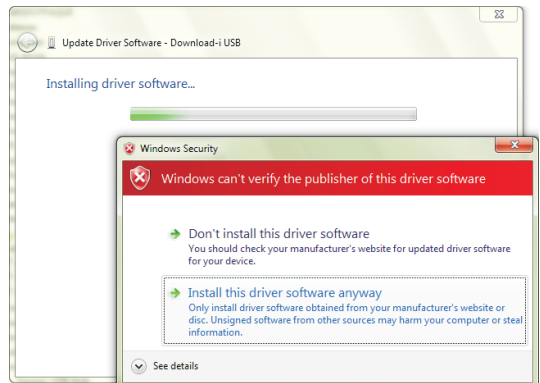


- 10 Wait for installation and click on **Close**.

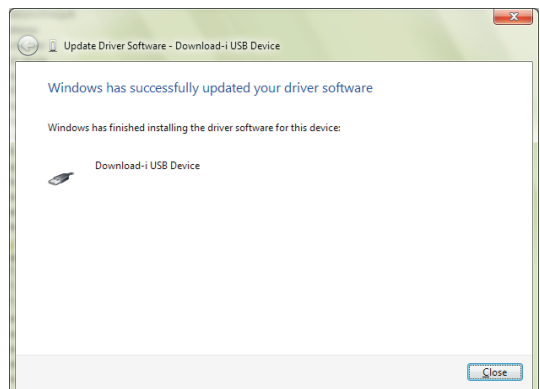

Download-i Installation for Windows Vista and Windows 7




11

Now will be necessary to install second driver software. Again in **Device Manager**, expand the **Other Devices** item and then right click on **USB Serial Port** and select the **Update Driver Software** option.

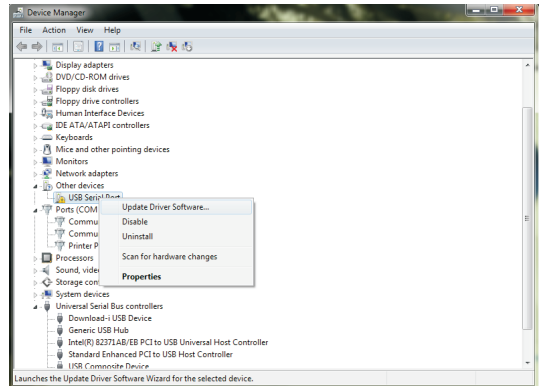

12


Following the same steps for the previous driver.

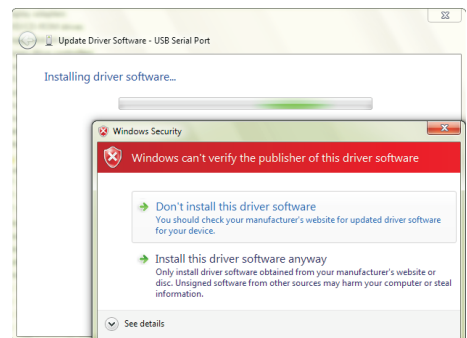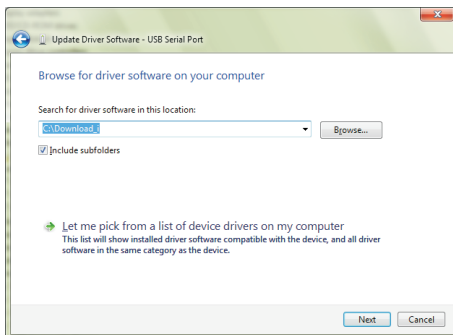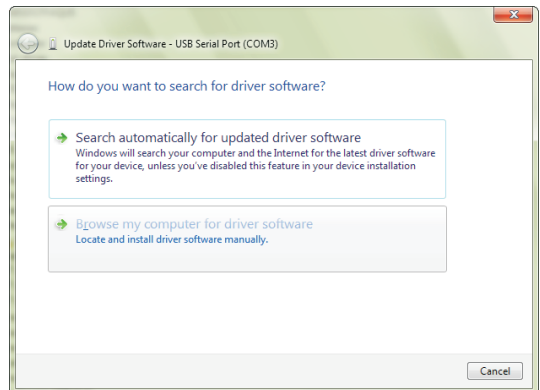

Download-i Installation for Windows Vista and Windows 7


13

Wait for installation and click on **Close** to complete the installation process in your computer.

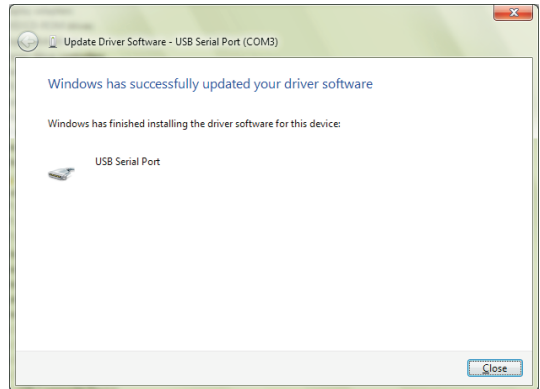

14

Set up PROGuard to the interface you are using. On the Interface menu choose **Configure**. On the Window **Interface Configuration**, select the option: Download-iRF ou Download-i USB local download via USB port.

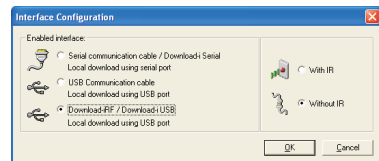

Note: Your Download-i, from now on is correctly installed and configured. Your Guardus device can now be downloaded, using the PROGuard management software.



For additional information about how to use PROGuard, please read the User's Manual available on the Contronics CD or on our website www.contronics.com. The digital version of this software is also available on the Contronics CD, in the Guides folder.



www.contronics.com

Contronics Technologies INC
8121 NW 68th Street
Miami, FL 33166 ·USA
Phone: (305) 994-3535

R. Lauro Linhares nº 589
Florianópolis-SC | Brasil
CEP 88036-002
Tel.: +55 (48) 2106-2222